

Perforated Face Diffusers

WPD MWPD

Introduction

The Waterloo high-induction ceiling diffuser type WPD has a perforated faceplate and easily adjustable air pattern settings. The diffuser is made from aluminium extrusions with the plenum manufactured from galvanised steel. The complete unit has been specifically designed to ensure a constant air pattern, resulting in optimal mixing with room air at a very low noise level. An optional mounting plate is available to suit 600 x 600 ceiling systems (the overall size of the mounting plate is 595 x 595).

Product Description

WPD-4	Square ceiling diffuser with 4 way air pattern
WPD-3	Square ceiling diffuser with 3 way air pattern
WPD-2	Square ceiling diffuser with 2 way air pattern
WPD-R	Square ceiling diffuser for return air
MWPD	Square diffuser mounted in perforated modular plate
WKDV	Supply air plenum
WKDVI	Insulated supply air plenum
WKRVI	Return air plenum
MPV	Modular plate
WWM	Fixing set

Features





- Supply and exhaust applications of warm, cool and isothermal air
- High induction characteristics
- Variety of air patterns
- Suitable for modular ceiling systems
- Excellent free-jet performance
- Adjustable 3 position faceplate

Finishes

PPM9010 (RAL 9010 20% Gloss White)
Other colours available on request

Advantages

- Excellent aerodynamic performance
- Good mixing with room air
- Can be used for full tile replacement
- Short throw

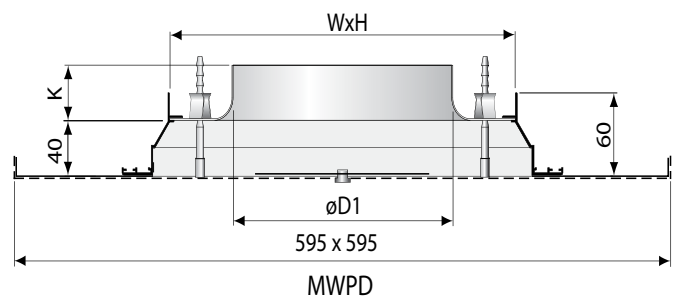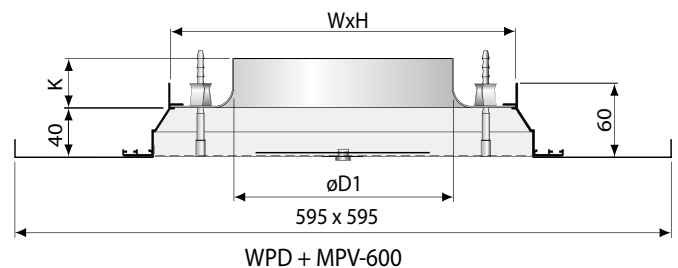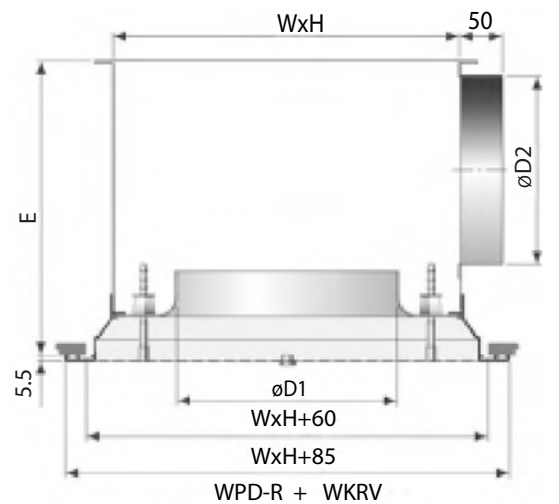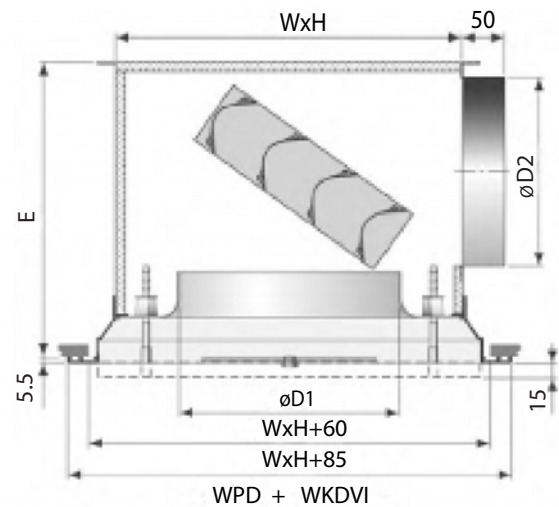


Order Example:

Type _____ WPD-4/200/WKDVI
Diffuser Pattern _____
Spigot Diameter _____
Plenum Type _____

W x H	øD1	øD2	E	K	X
210x210	125	125	243	33	0/ 7.5/15
210x210	160	160	243	33	0/ 7.5/ 15
310x310	200	200	290	40	0/ 7.5/ 15
410x410	250	250	355	55	0/ 7.5/ 15
510x510	315	315	435	70	0/ 7.5/ 15

Perforated Face Diffusers

WPD MWPD

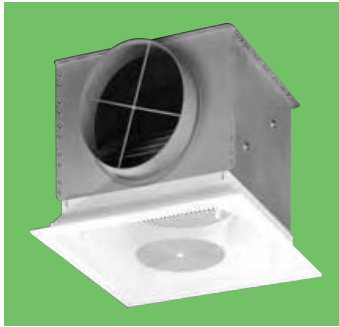

Selection Criteria

Ceiling Height 2.7 m
Temperature Differential -10K
Room Velocity V_r 0.15 m/s
Noise level is based on diffuser sound power level less 8db room absorption.

All selections include the plenum

Selection Example

WPD-4-125
4 way supply


Air Volume 56 l/s
Throw 1.0 m
Pressure Drop 33 Pa
Noise Level 36dBA

Faceplate Height Corrections	X (mm)	T' Throw (m)	Pressure (Pa)	Noise level (dBA)
	0	x 1.0	x 1.0	0
	7.5	x 0.9	x 0.9	- 2
	15	x 0.8	x 0.6	- 3

Performance Tables

WPD			Supply 4 way					Supply 3 way					Supply 2 way					Exhaust				
m³/h	l/s		125	160	200	250	315	125	160	200	250	315	125	160	200	250	315	125	160	200	250	315
100	28	T	0.5	0.4				0.5	0.4				0.6									
		Ps	8	3				11	5				17					5				
		Lw	-	-				-	-				22					-				
150	42	T	0.8	0.6				0.8	0.7				1.3	0.9								
		Ps	16	7				24	10				40	16				14				
		Lw	28	-				30	-				35	-				-				
200	56	T	1.0	0.8	0.7			1.1	0.9	0.8			2.0	1.1	0.8							
		Ps	33	12	5			24	18	8			68	30	12			25	11			
		Lw	36	22	-			39	26	-			46	31	-			23	-			
250	69	T	1.3	1.0	0.8	0.5			1.1	0.8	0.5			1.6	1.0	0.7						
		Ps	48	18	8	3			28	12	5			44	17	8		39	16			
		Lw	45	30	-	-			33	-	-			37	24	-		29	-			
300	83	T		1.2	1.0	0.8			1.3	1.1	0.9			2.1	1.3	1.1						
		Ps		28	12	5			40	18	7			64	27	11		56	21	9		
		Lw		39	21	-			40	24	-			45	29	-		33	-	-		
400	111	T			1.3	1.1	0.9			1.4	1.3	1.0			2.1	1.3	1.0					
		Ps			20	9	4			30	12	5			48	20	8		31	15		
		Lw			32	-	-			34	24	-			37	29	-		28	-		
500	139	T			1.6	1.4	1.2			1.7	1.7	1.3				2.6	2.1					
		Ps			32	13	6			48	20	7				30	11		44	24	10	
		Lw			38	26	-			43	32	21				35	25		34	24	-	
600	167	T				1.7	1.4				2.1	1.6				3.5	2.6					
		Ps				18	9				28	17				44	18			35	14	5
		Lw				33	22				37	25				41	30			27	-	-
750	208	T					1.7					2.0					3.3					
		Ps					13					18					28			54	22	11
		Lw					30					34					37			34	-	-
1000	278	T					2.3					2.7										
		Ps					24					28									36	14
		Lw					41					42									30	-

Accessories

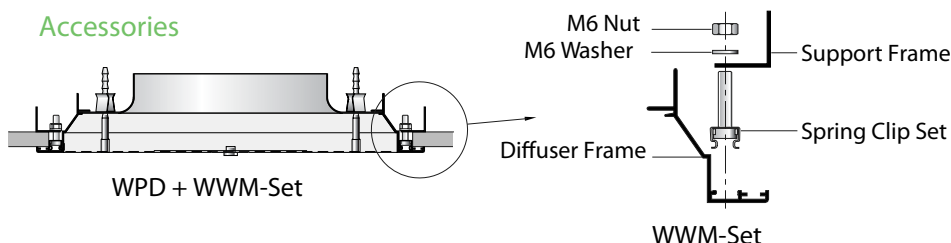

The WWM fixing set consists of 2 support frames, 4 spring clip sets and 4 M6 nuts and washers.